


N-type Connector Data Sheet



■ GLTT-005 Series (N-type Termination)




Technical Data


Electrical Data	Impedance	50 Ω	
	Max. Frequency	3 GHz	
	Insulation Resistance	Min. 5 G Ω	
Mechanical Data	Coupling Nut Retention Force	450Nm min	
	Durability	500 mating cycles	
	Recommended Mating Torque	0.68~1.13Nm	
Environmental Data	Operating Temp.	-40 °C ~125 °C	
	Vibration	MIL-STD-202	
	Shock	MIL-STD-202	
	RoHS	Compliant	

Material Data		Material	Surface Plating
	Center Contact	BeCu	Nickel Plating
	Body	Brass	Nickel Plating
	Insulator	PTFE	

N-type Connector Data Sheet

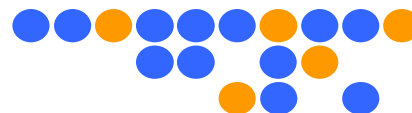

Outline Drawing

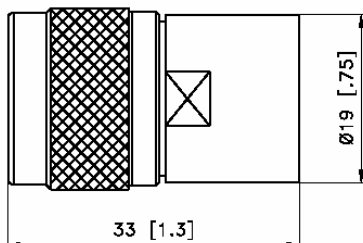

Unit : mm [inch]

Part Number

Part No.

(OLD P/N)

GLTT-005

(OLD: GLTN0300)

Performance

